
ReLock®

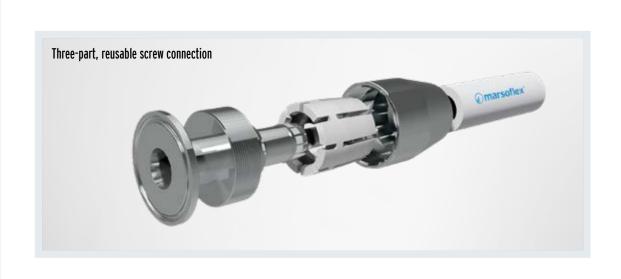

Three-part, consisting of: Socket with aseptic fitting (made of stainless steel), clamping ring (made of PVDF) and the screwed socket (made of stainless steel or PVDF)

The sockets are available with div. aseptic connections (in the pipe series A,B or C) (e.g. with TCS according to DIN 32676, groove flange according to DIN 11864-2).

Suitable for **@marsoflex*** silicone hoses type 200 and type 300 as well as for **@marsoflex*** silicone hose with PTFE core type 300 PTFE.

Our fittings are made according to DIN 11864-1, optionally in hygiene classes H3 or H4.

Other connections upon request

Surface quality DIN 11864-1 (Ra in μm)

Hygiene class	Internal surface	External surface
H3	< 0.8	< 1.0
H4	< 0.4	< 1.0

Article	DN
3TLG08	8
3TLG10	10
3TLG13	13
3TLG20	20
3TLG25	25
3TLG32	32
3TLG38	38
3TLG50	50